



Uptown Leather

Upholstery Leather

Grade 1



801 Rally Black

Grade 2

Spinneybeck Verona



VR 979 Butter



VR 908 Claret



VR 906 Midnight



VR 910 Thicket



VR 946 Dark Grey



VR 900 Black



VR 2010 Ruby



VR 8029 Caramel

For the complete Spinneybeck collection,
please refer to the Commercial Price List.

Spinneybeck

1•800•482•7777 for larger samples.

Upholstery Leather

Grade 3

Spinneybeck Volo



VO 982 Kilim



VO 901 Butterscotch



VO 939 Talc



VO 785 White



VO 968 Fumo Oscuro



VO 967 Deep Olive



VO 945 Tan



VO 944 Sand



VO 955 Marine Blue



VO 973 Ocean Deep



VO 980 American Gothic



VO 947 Coffee Bean




VO 903 Toast



VO 940 Doeskin



VO 969 Mammoth Cave

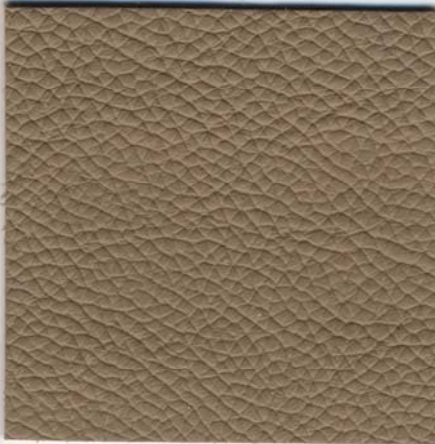

VO 957 Oatmeal



VO 937 Claret



VO 963 Tuscany



VO 965 Shaker Ochre



VO 910 Laurel



VO 900 Black

Grade 5

Spinneybeck Andes/Velluto Pelle
An additional 120 colors are available
in this quality.



VP 520 Persian Lime

For the complete Spinneybeck collection,
please refer to the Commercial Price List.

Spinneybeck 1•800•482•7777 for larger samples.

Upholstery Leather

Technical Data

Spinneybeck Leather

Standard Leather

Verona (VR)

A corrected, aniline dyed leather with a durable, breathable protective finish.

Raw Material: Northern Italian hides

Hide Size: 50-55 sq. ft.

Thickness: 0.9-1.0 mm

Light Fastness: Class 4
(AATCC Method 16, Option E, 72 hrs.)

Crocking: Dry: Class 4-5
Wet: Class 4
(ASTM D-5053)

Abrasion: 1,000+ cycles
(ASTM D-3884)

Flammability: Cal Tech Bulletin 117

Boston Fire Dept.
BFD IX-1

Cigarette Ignition
NFPA-260

Volo (VO)

A lightly corrected, aniline dyed leather with a durable, breathable protective finish.

Raw Material: Northern Italian hides

Hide Size: 50-55 sq. ft.

Thickness: 1.0-1.1 mm

Light Fastness: Class 4
(AATCC Method 16, Option E, 72 hrs.)

Crocking: Dry: Class 4-5
Wet: Class 4
(ASTM D-5053)

Abrasion: 1,000+ cycles
(ASTM D-3884)

Flammability: Cal Tech Bulletin 117

Boston Fire Dept.
BFD IX-1

Cigarette Ignition
NFPA-260

Andes/Velluto Pelle (AD/VP)

A smooth, lightly enhanced, aniline dyed leather with a durable, breathable protective finish.

Raw Material: Northern Italian hides

Hide Size: 50-60 sq. ft.

Thickness: 1.0-1.1 mm

Light Fastness: Class 4
(AATCC Method 16, Option E, 72 hrs.)

Crocking: Dry: Class 4-5
Wet: Class 4
(ASTM D-5053)

Abrasion: 1,000+ cycles
(ASTM D-3884)

Flammability: Cal Tech Bulletin 117

Boston Fire Dept.
BFD IX-1

Cigarette Ignition
NFPA-260

Rally Black

A top grain, semi-aniline leather at an economical price point.

Raw Material: Domestic hides

Hide Size: 47 sq. ft.
(average size)

Thickness: 0.9-1.1 mm

Flammability: Cal Tech Bulletin 117

Recommended Cleaning Instructions

Dust regularly. Minor spots can be washed off using lukewarm water and mild soap. Do not soak. Never clean with abrasive solvents, alcohol or wax-based products. Approved maintenance products are available from Spinneybeck.



6415 Katella Avenue
Cypress, CA 90630

☎ (888) 274-8664
☎ (714) 995-4855

🌐 www.sitonit.net
✉ sales@sitonit.net

Form No. C307-1 2/06 15M

Spinneybeck 1•800•482•7777 for larger samples.